


AB 150 TE



Frekans	Hz	50
Jeneratör Modeli		AB 150 TE
DY]b:]nÜh	TL	14.000

x N9 @@? @F

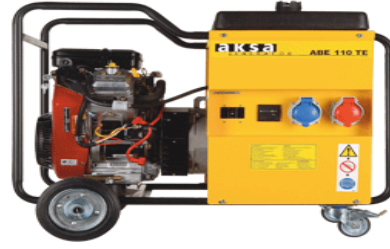

M5? H; x GH9F; 9G
? U'Ub'nÜ_ia]_Ufibi[" n'Yba Yg]b]gU 'UntÜb'XYdc
" nYf]bXY_][" gYf[Y



C < J 'A CHCF
6U_ia 'j Y_'j 'Übia 'i'XU'U'_c'Um' gH'Yb'gi dUd'i'a c'cf



M5 'KORUMASI
A c'cf'nÜ 'gin'_U'X' 'ibXU', U'i 'a Ugibi'" b'YnYfY_'a c'cfi
_cfi r



65? -A G-N'5? y
? i fi 'hdža 'XU'U'Y'j Y'VU_ia '[Yfy_hfa YnYb'i ni b'" a 'f'
U_



H9? 9F @9? 'J 9'H5 -A 5'G GH9A
HU 'ia UXU'_c'Um'_gU 'UntÜb 4 adet tekerlek



5 'ifi'_U_ia ; Y_]X]]bXY'XYj fYmj'_YgYfY_'YbYfUk f'
_cfi mÜb' U'Yf



9B8y GHF M9@H D':
%'5'j YnÜ' &'5'_L'YbX' g'f]m'Z' 'gUmYg]bXY'U 'if' UfhUfU
XUntÜb'_i'Z'



SAATMETRE



> ? @9'G GH9A
'_'; U'i 'hfa UXU'j YnÜ'gc: i '_\Uj U'UfXU'_c'Um, U'i 'hfa U
Ua U, 'iznYb[]b mÜ_ih_Ufi 'ia 'i'gU 'UntÜb'g]ghYa



u : H'9@9A 5B@=< 5J 5': @HF 9G
9a]Yb'\Uj Ubib'fc'n] Y'd]g]_YfXYb'Ufiba Ugibi'gU 'UntÜb
,]znY'Ya Ub'_i'\Uj U'Z]fYg]



6y My? 'M5? H'H5B? =
16'h

AB 150 TE

JENERATÖR

AC Nominal Güç	kW	10.4
	kVA	13
Maksimum Güç	kW	11.6
57 'Bca]bU'5_ia	57 'Bca]bU'5_ia	18.8
Voltaj (faz-faz)	V	400
Frekans	Hz	50
: Un'GUmigi		3
Güç Faktörü		0,80
MU_ihH' _Yfja]	L/sa	6.7
G' fY_]uU' a U	Saat	2
Gürültü Seviyesi (7m.)	dB(A)	78.8

MOTOR

Motor Modeli		Vanguard 23 hp / 3864
Devir	d/dk	3000
Güç	Hp	23@3600 rpm
Silindir No.		2,0
Silindir Hacimi	mL.	627
MU_ihH' f'		Benzin
MU_ihHUb_? UdUg]hYg]	L	16,0
GRUfh' Y_]		Elektrikli

BOYUT

En	mm.	740
Boy	mm.	910
Yükseklik	mm.	750